



315-1000W

Horizontal DE

VOLTAGE: 120-347V

SKU: IL-HLDE


Professional Grade Lighting System

ELECTRICAL PARAMETERS

Wattage Range	315-1000W
Voltage Range	120-347V
Maximum Pulse Rating	5MV
Maximum Operating Temperature	35°C / 95°F



STANDALONE COVERAGE

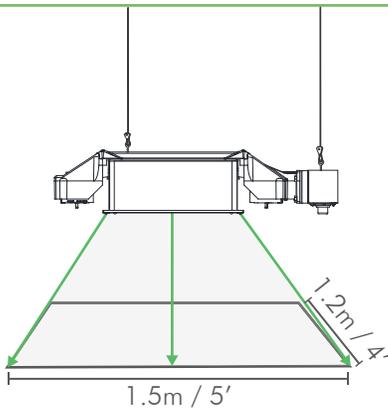

COMPATIBLE WITH:

- ▶ DE HPS Lamps
- ▶ DE MH Lamps
- ▶ DE CMH Lamps
- ▶ CMH Remote Ballast
- ▶ HPS Remote Ballast

MAXIMUM UNIFORMITY

Due to the high quality German materials and design of the ILUMINAR Deep reflector you are guaranteed the highest levels and uniformity for your garden. Swap with the ILUMINAR Wide reflector for lower clearance grow rooms.

RUGGED DESIGN

Made of a coated, die-cast aluminum the reflector bracket is stable and durable, made for a life-long of trouble-free use.

PHYSICAL SPECIFICATIONS

Length	520mm	20.47"
Width	245mm	9.64"
Height	140mm	5.51"
Weight	2.4kg	5.29lbs


REPLACEABLE REFLECTOR

All our reflectors are easy to replace, guaranteeing optimal performance of your equipment and prolonging the life of our investment. Due to grow room conditions, we recommend replacing your reflector every year. Do not attempt to clean the reflector, as the process of cleaning will damage the reflectivity of the reflector.

245mm / 9.64"



140mm / 5.51"



ROLL LOCK TECHNOLOGY

Includes the ILUMINAR proprietary single-handed "roll lock" socket for our fixtures - that means simple, one-handed lamp installation. No more dropped bulbs!

Lamp Cord : ST 3/C 16AWG 105°C VW-1 600V

iluminarlighting.com
Toll Free: 1-877-540-5588

1 YEAR WARRANTY



© Copyright 2022 ILUMINAR Lighting
Subject to change without notice.